



Department
for Environment
Food & Rural Affairs

Report on measures for 2019 exceedance of the Target Value for Benzo[a]pyrene in South Wales non- agglomeration zone (UK0041)

December 2021



© Crown copyright 2021

You may re-use this information (excluding logos) free of charge in any format or medium, under the terms of the Open Government Licence v.3. To view this licence visit

www.nationalarchives.gov.uk/doc/open-government-licence/version/3/ or email PSI@nationalarchives.gov.uk

This publication is available at www.gov.uk/government/publications

Any enquiries regarding this publication should be sent to us at

Air Quality and Industrial Emissions
Department for Environment, Food and Rural Affairs
Ground Floor, Seacole Building
2 Marsham Street

London, SW1P 4DF Email: air.quality@defra.gov.uk

With technical input from Ricardo Energy & Environment

www.gov.uk/defra

Contents

1. Introduction4

 1.1 Context.....4

 1.2 Status of zone4

2 Exceedance situation South Wales [B[a]P_UK0041_2019_1] related to industrial emissions.....7

 2.1 Description of exceedance7

 2.2 Source apportionment11

 2.3 A detailed local assessment.....13

 2.4 Measures14

1. Introduction

1.1 Context

Under the Air Quality Standards Regulations 2010¹, the target value (TV) for Benzo[a]pyrene (B[a]P) is an annual mean concentration of 1 nanogram (one billionth of a gram (10^{-9})) per cubic metre (m^{-3}) of ambient air or lower. The regulation requires the UK to report on measures in place to address the exceedance of the TV and that all reasonable measures that do not entail disproportionate cost should be taken to ensure this target is not exceeded.

The UK will continue to meet its reporting obligations through making this data available to the public.

Exceedance of the TV was reported in 2013, 2014, 2015, 2016, 2017 and 2018 in the South Wales non-agglomeration zone and a report on measures was published detailing the exceedance and the measures in place².

This document reports the exceedance situation for 2019 reflecting the more recent assessment and updating the 2013, 2014, 2015, 2016, 2017 and 2018 reports on measures.

1.2 Status of zone

This is the report on measures required for exceedances of the TV for B[a]P within the South Wales zone identified within the 2019 UK air quality assessment. Exceedances within this zone were identified on the basis of model results providing supplementary information. This exceedance was reported via e-Reporting dataflow G³ on attainment for the compliance assessment in 2019 when the UK was a member state and Air Pollution in the UK⁴.

Table 1 summarises the spatial extent and associated resident population for the exceedances identified in this zone, as reported via e-Reporting.

¹ <http://eur-lex.europa.eu/LexUriServ/LexUriServ.do?uri=OJ:L:2005:023:0003:0016:EN:PDF>

² <https://uk-air.defra.gov.uk/library/bap-nickel-measures>

³ <http://cdr.eionet.europa.eu/gb/eu/aqd>

⁴ <http://uk-air.defra.gov.uk/library/annualreport/index>


Table 1. Area exceeding B[a]P target value in 2019 and associated population for South Wales zone UK0041

Zone code	Zone Name	Area exceeding TV (km ²)	Population exceeding TV
UK0041	South Wales	6	0


Figure 1a shows the locations of the exceedances in the context of the zone as a whole. Figure 1b shows the part of the zone including the exceedances in more detail.

Figure 1. Location of exceedance of the B[a]P target value during 2019 in South Wales zone UK0041. Areas of the zone in exceeding grid squares are marked red.

a) The whole zone

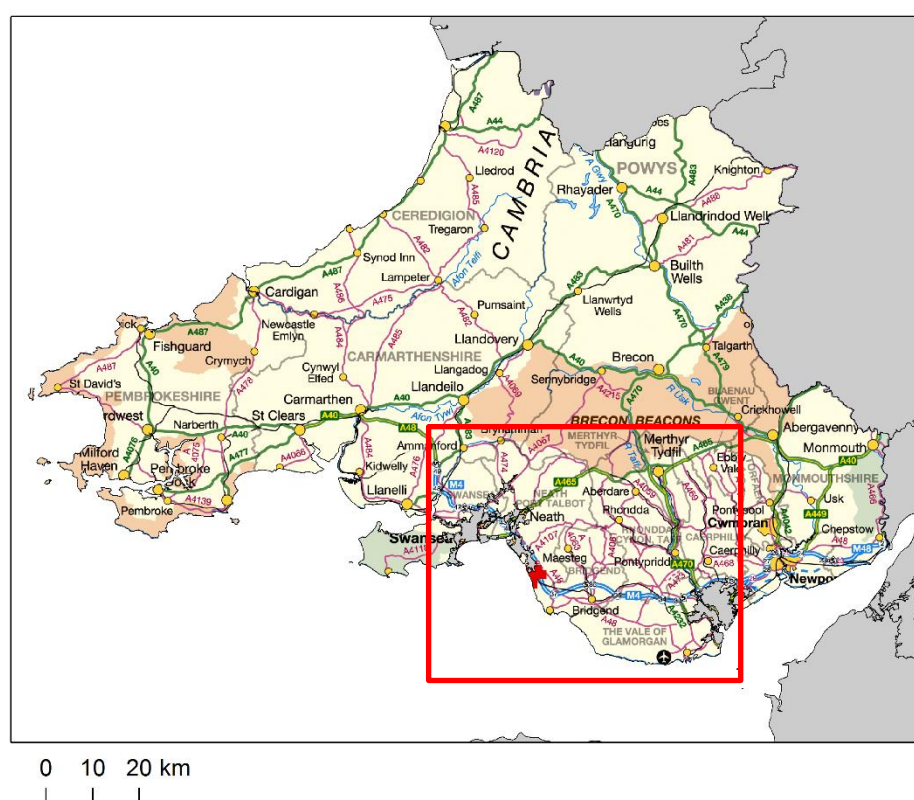

b) The exceedance locations at higher spatial resolution

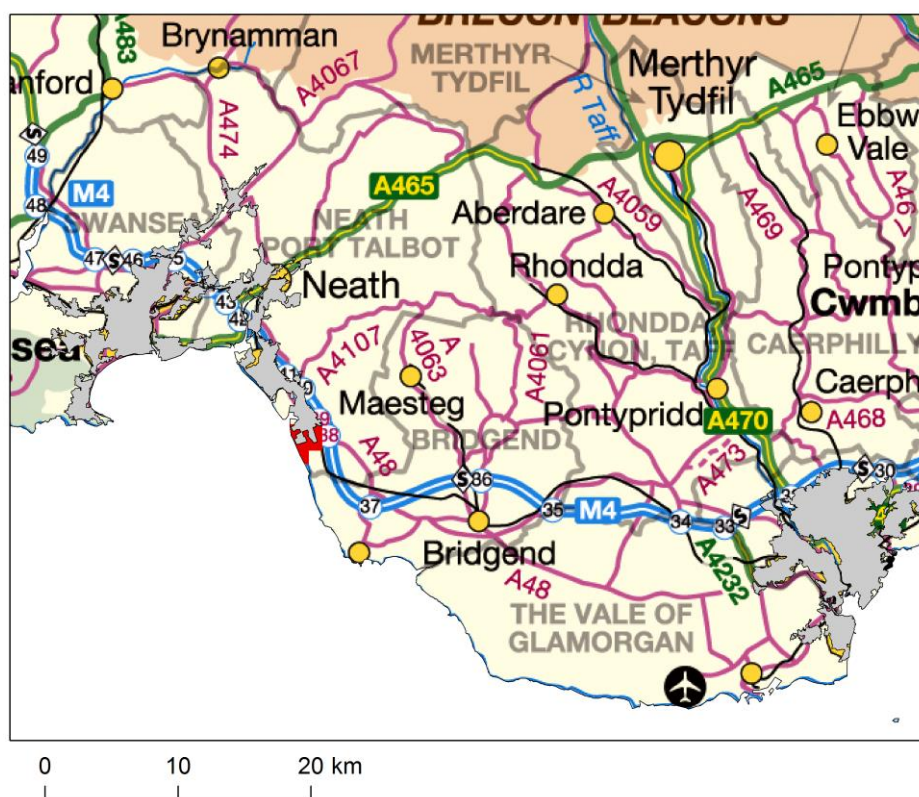

An initial source apportionment was carried out and this analysis has identified a single exceedance situation in this zone:

- South Wales [B[a]P_UK0041_2019_1] related to industrial emissions (area of exceedance 6 km²)

Following the approach developed for the previous report on measures for 2014, a subsequent more detailed modelling assessment was carried out for 2015, 2016, 2017 and 2018 using additional local data. Whereas the 2014 assessment concluded there was unlikely to be an exceedance of the TV outside the boundary of the industrial site in 2014, the more recent assessment indicate it was likely there was an exceedance of the TV at locations close to the industrial site in 2015, 2016, 2017 and 2018. This change has been linked to the adoption of an improved assessment method for fugitive emissions. This has led to a significant increase in reported coke ovens emission in recent years and is discussed later in this report. This report includes a description of the exceedance situation, including maps, information on source apportionment and a list of measures already taken or to be taken.

2 Exceedance situation South Wales [B[a]P_UK0041_2019_1] related to industrial emissions

2.1 Description of exceedance

This exceedance situation has an area of exceedance of 6 km² in Margam in Neath Port Talbot. Figure 2 shows the location of the exceedance situation, as predicted by the national model in detail. The exceeding grid squares are numbered in Figure 2 and in subsequent tables for easy reference. There is no resident population in all of the 6 grid squares. This exceedance situation is adjacent to and shares common sources with the exceedance situation Swansea Urban Area [B[a]P_UK0027_2019_1].

Figure 2 also shows the locations of the monitoring site associated with the exceedance situation (Port Talbot Margam, which is in Swansea Urban Area zone UK0027) and the locations of the key industrial sources. The area shown on this map includes grid squares assigned to both the Swansea Urban Area (UK0027) and South Wales (UK0041) zones. The grid squares assigned to the Swansea Urban Area zone and exceedance Swansea Urban Area [B[a]P_UK0027_2019_1] are shown as hatched and the non-hatched red grid squares correspond to this exceedance situation, which is South Wales [B[a]P_UK0041_2019_1].

Table 2 lists the measured concentrations of B[a]P in this zone since 2008. The measured concentrations in this zone were below the TV in all years. The Newport monitoring station is about 55 km from the modelled exceedance situation.

Table 2. Measured annual mean B[a]P concentrations in South Wales zone UK0041 from 2008 to 2020 (ngm⁻³). (Percentage data capture is shown in brackets).

Station (Eol code)	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020
Newport (GB0962A)	0.34 (99)	0.22 (89)	0.25 (84)	0.14 (94)	0.23 (96)	0.21 (97)	0.21 (100)	0.19 (99)	0.25 (100)	0.19 (61)	0.16 (74)	0.18 (96)	0.15 (91)

Table 3 lists the exceeding grid squares and the resident population.

The measurements at Port Talbot Margam were less than the TV. In modelling the spatial coverage of B[a]P concentrations, the national scale model predictions were calibrated to match the measurements. The calibrated predictions exceeded the target in the vicinity of the steelworks industrial complex in Port Talbot due to industrial emissions. 1 km grid squares have been classified as exceeding the TV if at least nine 100 m grid squares exceed the TV or at least one 100 m grid square exceeds and there is residential population in the exceeding 100 m grid squares. A concentration value was defined for each 1 km grid square from the fine scale modelling as the mean of the 100 m grid squares exceeding the TV within that 1 km grid square. Subsequent finer scale modelling that included a more detailed assessment also predicted exceedances of the TV at locations close to the industrial site in 2015, 2016, 2017 and 2018. The assessment is discussed in more detail in section 2.3.

Figure 2 shows the locations of the key industrial sources. The area shown on this map includes grid squares assigned to both the Swansea Urban Area (UK0027) and South Wales (UK0041) zones. The grid squares assigned to the South Wales zone are the non-hatched red grid squares. A slightly smaller area of exceedance has been identified in 2019 than in previous years, as shown in Figure 2.

Figure 2. Exceedance situation South Wales [B[a]P_UK0041_2019_1]. Exceeding grid squares are marked red. Locations of coke works at Morfa and sinter plant at Port Talbot are also shown. Non-hatched grid squares are those assigned to South Wales zone UK0041. Hatched grid squares are assigned to Swansea Urban Area zone UK0027 and do not form part of this exceedance situation.

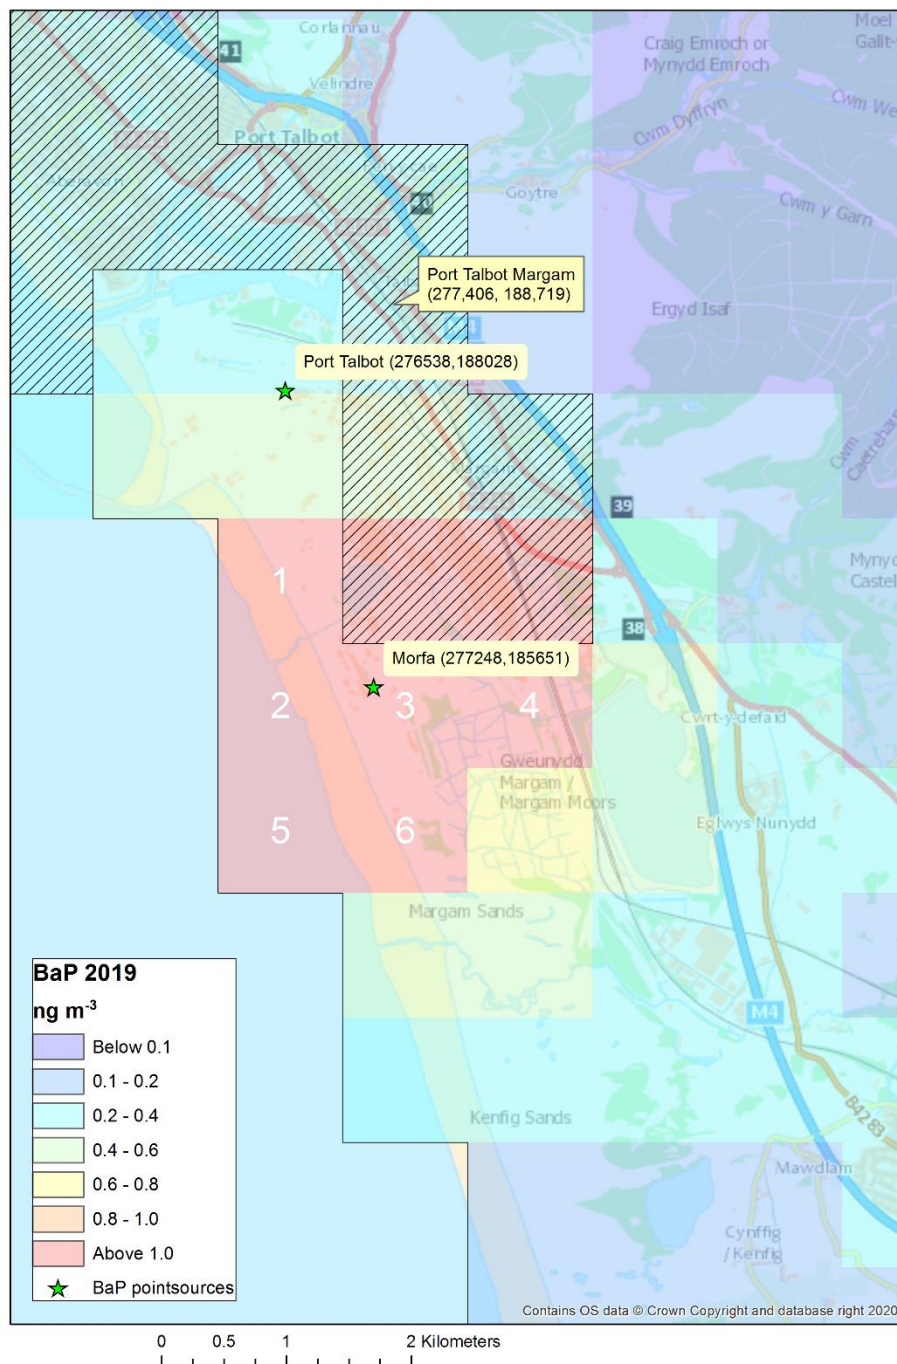


Table 3. Exceeding grid squares for exceedance situation BaP_UK0041_2019_1.

Grid square number	Resident population	Notes
1	0	Steelworks industrial complex
2	0	Steelworks industrial complex
3	0	Steelworks industrial complex
4	0	Steelworks industrial complex, industrial land
5	0	Sea
6	0	Partly steelworks industrial complex

2.2 Source apportionment

Table 4 provides a breakdown of the main emission sources (source apportionment) that have contributed to the grid squares in this exceedance situation, highlighting the significant contribution from industrial sources. The penultimate column is the total from all emission sources. The values in this column have been rounded to 1 decimal place for consistency with the values used in the compliance assessment. The values in the other columns have not been rounded. The other shaded columns are the subtotals for the regional, urban background and local contributions. Table 5 gives a more detailed source apportionment indicating how the separate industrial processes contribute to the total industrial figure. This shows that the coke ovens at Morfa are the main sources associated with this exceedance situation.

Table 4. Source apportionment for exceedance situation South Wales [B[a]P_UK0041_2019_1]. Annual mean B[a]P concentration (ngm⁻³)

Grid square number	OS easting (m)	OS Northing (m)	Zone	a) Regional background: Total	b) Urban background increment: Total	Urban background increment: Traffic	Urban background increment: Industry including heat and	Urban background increment: commercial and residential	Urban background increment: Shipping	Urban background increment: Off road mobile machinery	Urban background increment: Other	c) Local increment: Total	Local increment: Industry including heat and power production	Total for all emission sources (a+b+c)	Resident population
1	276500	186500	41	n/a	0.024	0.002	0.000	0.020	0.000	0.000	0.002	2.800	2.800	2.8	0
2	276500	185500	41	n/a	0.024	0.002	0.000	0.019	0.000	0.000	0.002	4.471	4.471	4.5	0
3	277500	185500	41	n/a	0.029	0.005	0.000	0.020	0.000	0.000	0.003	7.563	7.563	7.6	0
4	278500	185500	41	n/a	0.035	0.008	0.001	0.022	0.000	0.001	0.004	1.467	1.467	1.5	0
5	276500	184500	41	n/a	0.020	0.002	0.000	0.016	0.000	0.000	0.002	1.193	1.193	1.2	0
6	277500	184500	41	n/a	0.023	0.002	0.000	0.017	0.000	0.000	0.003	1.485	1.485	1.5	0

Table 5. Detailed source apportionment for industrial sources only for exceedance situation South Wales [B[a]P_UK0041_2019_1]. Annual mean B[a]P concentration (ngm⁻³)

Grid square number	OS easting (m)	OS Northing (m)	Zone	Morfa coke ovens	Port Talbot, other plant	Local increment: Industry including heat and power production
1	276500	186500	41	2.800	0.000	2.800
2	276500	185500	41	4.471	0.000	4.471
3	277500	185500	41	7.563	0.000	7.563
4	278500	185500	41	1.466	0.001	1.467
5	276500	184500	41	1.192	0.000	1.193
6	277500	184500	41	1.485	0.000	1.485

2.3 A detailed local assessment

In order to assess this exceedance in more detail, a dispersion modelling assessment is usually undertaken by NRW, making use of local data. Tata Steel Works is the major fixed B[a]P source in the local area. The background concentration for this assessment is derived from the difference between local measurements at Margam monitoring site and modelled process contribution from the Steel Works at the Margam site. This assessment approach has worked well in the last six years. The Steel Works emissions accounted for up to 50% of the B[a]P measured at the Margam site. This year (for 2019 reporting), the modelling compliance assessment was unable to be completed because while the Steel Works emissions and meteorological conditions remained similar to the previous years a very significant (more than 50% compared to previous years) reduction was measured at the Margam site. This leads to a negative background concentration, namely, the model predicted Steel Works' contribution would account for all the

measurement at the Margam site. Investigations are currently underway to identify the problem by reviewing the B[a]P measurements data at Margam site, emissions data and modelling approach.

2.4 Measures

The main overview report contains more information on how industrial sites are regulated. The Industrial Emissions Directive (IED) (2010/75/EU) sets out control emissions within specific industrial sectors like iron & steel. There are no specific Best Available Techniques (BAT) conclusions within the IED Iron and Steel (IS) BAT Reference Document (BREF) , specifically setting out any BAT Associated Emissions Limits or direct techniques or measures to prevent or minimise B[a]P emissions. However, there are some narrative and specific BAT Conclusions to indirectly prevent or minimise B[a]P emissions by reducing fugitive or point source particulate emissions. Following the 2016 sector permit review to adopt the IS BAT Conclusions, permit conditions relevant to Polycyclic Aromatic Hydrocarbons (PAH) emissions, transposed these with a focus on the Coke Ovens and the Sinter Plant that are the main sources and mass release of B[a]P pollutant. The IS BREF contains stringent requirements for iron and steel works to significantly reduce their fugitive emissions (especially particulate matter), indirectly including PAH and subsequently (B[a]P emissions).

Reason for increases in reported coke oven emissions and next steps

In 2015 the implementation of the BREF for Iron and Steel production, resulted in the need to improve the monitoring of fugitive emissions from the coke ovens.

The method employed prior to 2015 (BCRA method) required an estimate to be carried out every three months relied on a subjective assessment of leak severity. The industrial operator agreed a new method with the regulator (NRW) which was adapted from the US EPA methodology. This methodology requires the leaks be monitored and recorded daily and does not attribute a severity to the leaks, all leaks are treated as a priority. When both methods were assessed side by side it was clear that the BCRA method gave a favourable estimation of the fugitive emission resulting in a low estimation factor per tonne of coke. The new methodology has resulted in an increase in the estimation of B[a]P released from the coke ovens in 2015, however the actual release is likely to be similar to previous years.

The change in the methodology has meant that the operator has a better understanding of the precise sources of fugitive emissions and enabled a targeted improvement programme to be established. This improvement programme was expected to show a decrease in results in 2017 and 2018. Monitoring has shown a decrease in 2017 but a slight increase in 2018 caused by a high result in May, with subsequent months showing a return to a lowering trend that continues into 2019 and 2020. The site regulator will continue to focus on better performance through regulatory work and will review the interventions following analysis of the 2018, 2019 and 2020 data.

Table 6 shows the measures taken or to be taken at the Port Talbot industrial site.

Table 6. Table of measures taken or to be taken at Port Talbot industrial site

Measure code	Description	Classification	Implementation dates	Other information	Comment	Future work
Coke Ovens 1	<p>Measures to meet new fugitive BAT emission limits</p> <p>BAT-Associated Emission Levels (BAT-AELs)</p> <p>BAT-Associated Emission Performance Levels (BAT-AEPLs)</p>	Permit systems and economic instruments: IED permits	<p>Start: 2015</p> <p>Expected end: 2027 (tied to lifespan of asset).</p> <p>Status: Implementation</p>	<p>Source affected: Industry including heat and power production</p> <p>Spatial scale: Local</p> <p>Cost: Not available</p> <p>Indicator: Emissions estimate</p> <p>Target emissions reduction: Not available</p>	<p>TATA Steel has adopted a modified US EPA method for fugitive release assessment. This method uses a binary 'leak-no leak' assessment and directly compares to the BATc.</p> <p>TATA has previously committed to coke ovens life extension expenditure worth ~£3m/year over three years. The coke ovens life extension project is ongoing, and TATA continues to invest in this area.</p> <p>Compliance with the new limits has been summarised below for tops, doors and charging emissions.</p> <p>Where compliance has not been achieved, NRW has responded in accordance with its Compliance Classification Scheme (CCS) and has worked with TATA to achieve compliance with the BAT-AELs and AEPLs.</p>	<p>Fugitive releases from Morfa Coke Ovens (MCO) are affected by the internal operating pressure of the ovens. This pressure is at its highest when ovens are initially charged with coal and there is the maximum production of coke oven gas (COG).</p> <p>The rate of COG production gradually decreases as the contents of the oven are carbonised. TATA has optimised the gas pressure controls on individual ovens to improve the overall control system and therefore minimise fugitive releases of B[a]P from its coke oven batteries.</p> <p>MCO's operational lifespan is projected to be the late-2020s thanks to the life extension project. As the coke oven batteries age, the likelihood of permit non-compliances and elevated emissions may increase despite the life extension measures.</p>

					<p>NRW continues to apply CCS scores in response to any notifiable emission limit breaches.</p> <p>An EPR Regulation 61 Notice was used in 2018; TATA's response included an action plan with timescales outlining a pathway towards compliance. This Notice and TATA's action plan remained active during 2019.</p> <p>Compliance with the relevant emission limits (BAT-AEPLs) for coke oven doors, tops and charging emissions has been sustained since February 2019.</p> <p>MCO remains an important part of NRW's compliance inspection programme for Port Talbot steelworks and we continue to apply regulatory effort to ensure the permit requirements are met.</p>	<p>As MCO progresses towards the end of its extended campaign life, TATA should outline its strategy for this key asset and clarify its preferred method of iron & steelmaking going forwards. Other critical assets necessary for integrated iron & steelmaking (using Blast Furnace technology) are also approaching the end of their projected design life e.g. sinter plant.</p> <p>Replacement coke ovens may require significant planning (~5yrs design & construction) and capital expenditure (>£500m).</p> <p>Further notices will be considered by NRW if environmental performance deteriorates, and repeated CCS scores are incurred for emission limit breaches at MCO.</p>
--	--	--	--	--	--	---

Coke Ovens 2	<p>Spigot improvements.</p> <p>The spigot is the joint between the oven and the gas main. Measures include fitting of new collars, 'repacking' existing spigot seals, fitting new seals and shortening of ascension pipes.</p>	Permit systems and economic instruments: IED permits	<p>Start: 2015</p> <p>Expected end: 2019</p> <p>Status: Achieved</p>	<p>Source affected: Industry including heat and power production</p> <p>Spatial scale: Local</p> <p>Cost: Not available</p> <p>Indicator: Percentage leak rate reduced to target of 1%</p> <p>Target emissions reduction: Not available</p>	<p>Control of fugitive emissions from coke ovens will result in lower B[a]P emissions.</p> <p>The BAT-AEPL (Associated Emission Performance Level) for coke oven tops is 1% leakage rate (99% leak free). A sequential programme of work has been ongoing to progressively reduce leakage. This has been balanced against the complexities of working on live coke oven batteries (ovens are kept in continuous operation).</p> <p>Significant effort has been applied by TATA to reduce fugitive emissions from coke oven tops. Improved performance has coincided with secured capital expenditure (coke ovens life extension project) and an optimised maintenance regime involving rolling replacement of ascension pipes and repair/re-sealing of spigots.</p> <p>TATA has also overhauled its COG collector main control systems and renewed its gas pressure monitoring capability, allowing faster response to COG</p>	<p>It should be noted that as the ovens age, the likelihood of permit non-compliances and elevated emissions may increase despite the life extension measures.</p> <p>At MCO there are two COG collection mains for each oven and four charge holes. TATA has completed a feasibility study for converting MCO to a single COG collection main. A single main would significantly reduce the number of emission points along the coke oven battery tops; however, TATA's feasibility study and cost-benefit analysis does not support a viable single COG main conversion.</p> <p>The overhauled and renewed COG pressure control systems at MCO should – with sufficient maintenance – allow effective control of emissions from coke oven tops. This work has been combined with control improvements at the MCO Exhauster unit which draws COG from the coke oven batteries.</p> <p>TATA has trialled mechanical spigots on some ovens but has concluded that its current</p>
--------------	--	--	--	---	--	--

				<p>pressure imbalances and greater protection for spigot components.</p> <p>NRW has responded to any identified permit non-compliance in accordance with its Compliance Classification Scheme (CCS).</p> <p>Significant progress has been made with 99% leak free performance achieved in February 2019. Compliance with the BAT-AEPL for tops has since been sustained over many months.</p> <p>Target achieved (<1% leakage) but ongoing maintenance is necessary to sustain compliance.</p> <p>Coke Ovens performance is discussed at least every quarter with Tata Steel. Sustained compliance may become more challenging as the batteries approach the end of their campaign life.</p>	<p>programme of prioritising and (manually) repairing/re-sealing spigot joints is sufficient to maintain performance.</p> <p>More generally, TATA should outline its future strategy for MCO and clarify its preferred method of iron & steelmaking going forwards, within a wider context of developing low-carbon steelmaking technology.</p>
--	--	--	--	--	---

Coke Ovens 3	<p>Coke Oven door improvements</p> <p>Each coke oven has two sets of doors at either end. Hot coke is pushed from the 'ram side' doors through the 'coke side' doors into waiting rail cars. Doors and door frames require regular maintenance and periodic replacement to minimise fugitive emissions.</p>	Permit systems and economic instruments: IED permits	<p>Start: 2015</p> <p>Expected end: 2019</p> <p>Status: Achieved</p>	<p>Source affected: Industry including heat and power production</p> <p>Spatial scale: Local</p> <p>Cost: Not available</p> <p>Indicator: Percentage leak rate reduced to target of 10%</p> <p>Target emissions reduction: Not available</p>	<p>Control of fugitive emissions from coke ovens will result in lower B[a]P emissions.</p> <p>The BAT-AEPL (Associated Emission Performance Level) for coke oven doors is 10% leakage rate (90% leak free). A sequential programme of work has progressively reduced door leakage. This has been balanced against the complexities of working on live coke oven batteries (ovens are kept in continuous operation).</p> <p>An optimised coke oven door cleaning, maintenance and repair programme is in place at MCO. TATA has standardised its door cleaning methods and invested in new jetting equipment. TATA also periodically replaces degraded doors and door seals.</p> <p>The door leakage rate has dropped noticeably across both batteries. Improved performance has coincided with secured capital expenditure (coke ovens life extension project) and refinement of maintenance plans and procedures.</p>	<p>It should be noted that as the ovens age, the likelihood of permit non-compliances and elevated emissions may increase despite the life extension measures.</p> <p>Leaks from coke oven doors occur when hot gases penetrate the seals between the door and its frame. Doors and frames are routinely cleaned to ensure a tight seal. At MCO, a 'knife-edge' door seal design is employed.</p> <p>Previously TATA considered a remotely controlled cleaning device for the small 'leveller' doors which are difficult to clean. This has been abandoned for technical reasons. TATA's door cleaning programme targets leveller doors and seals to provide equivalent cleaning.</p> <p>TATA has trialled a new type of coke oven door (with tighter 'z' seals). However, increased cleaning efficiency, improved knife-edge seal design and optimised maintenance has resulted in better door sealing. Door frame cleaning functionality also exists on MCO's ram and guide machines.</p>
--------------	---	--	--	--	--	---

				<p>NRW has responded to any identified permit non-compliance in accordance with its Compliance Classification Scheme (CCS).</p> <p>Significant progress has been made with 90% leak free performance achieved in August 2018. Compliance with the BAT-AEPL for doors has since been sustained over many months.</p> <p>Target achieved (<10% leakage) but ongoing maintenance is necessary to sustain compliance.</p> <p>Coke Ovens performance is discussed at least every quarter with Tata Steel. Sustained compliance may become more challenging as the batteries approach the end of their campaign life.</p>	<p>The scope of TATA's door trial has evolved and is now part of its continuous improvement initiatives at MCO. The Original Equipment Manufacturer (OEM) is examining the existing door design to minimise and potentially eliminate manual intervention.</p> <p>More generally, TATA should outline its future strategy for MCO and clarify its preferred method of iron & steelmaking going forwards, within a wider context of developing low-carbon steelmaking technology.</p>
--	--	--	--	---	--

Coke Ovens 4	<p>Reduction of emissions during charging</p> <p>Coke ovens are 'charged' with coal through charge holes in the top of each oven. The charging nozzles, oscillators, holes and lids all require regular maintenance and periodic replacement to minimise fugitive emissions.</p>	Permit systems and economic instruments: IED permits	<p>Start: 2015</p> <p>Expected end: 2019</p> <p>Status: Achieved</p>	<p>Source affected: Industry including heat and power production</p> <p>Spatial Scale: Local</p> <p>Cost: Not available</p> <p>Indicator: Duration of release reduced to 30 seconds as a monthly mean.</p> <p>Target emissions: Not available</p>	<p>Control of fugitive emissions from coke ovens will result in lower B[a]P emissions.</p> <p>BAT-AEPL for visible emissions from charging is <30 seconds per charge expressed as a monthly mean. A sequential programme of work has progressively reduced charging emissions. This has been balanced against the complexities of working on live coke oven batteries (ovens are kept in continuous operation).</p> <p>Key items of equipment (charge holes and the coal charging apparatus) have now all been refurbished and/or replaced.</p> <p>Charging emissions have dropped noticeably across both batteries, often achieving around 20 seconds visible emissions per charge as a monthly average. Improved performance has coincided with secured capital expenditure (coke ovens life extension project) and refinement of maintenance plans and procedures.</p>	<p>It should be noted that as the ovens age, the likelihood of permit non-compliances and elevated emissions may increase despite the life extension measures.</p> <p>TATA continues to follow a rolling maintenance programme for its coke oven charging equipment. This includes surveying charge holes and correcting mis-aligned charge hole frames.</p> <p>Automatic systems to seal charge hole lids and clean carbon residues from holes and frames have been considered with technical input from the Original Equipment Manufacturer (OEM). TATA has determined that its current programme of manual sealing and cleaning provides an equivalent level of performance.</p> <p>TATA has indicated that it will retain a dedicated resource going forwards for charge hole lid sealing and carbon cleaning.</p> <p>More generally, TATA should outline its future strategy for MCO and clarify its preferred method of iron & steelmaking going forwards,</p>
--------------	--	--	--	---	--	--

					<p>NRW has responded to any identified permit non-compliance in accordance with its Compliance Classification Scheme (CCS).</p> <p>Significant progress has been made and charging emissions have been compliant with the BAT-AEPL since February 2019. Compliance has since been sustained over many months.</p> <p>Target achieved (<30 seconds visible emissions per charge) but ongoing maintenance is necessary to sustain compliance.</p> <p>Coke Ovens performance is discussed at least every quarter with Tata Steel. Sustained compliance may become more challenging as the batteries approach the end of their campaign life.</p>	<p>within a wider context of developing low-carbon steelmaking technology.</p>
--	--	--	--	--	---	--

<p>Coke Ovens 5</p>	<p>Reduction of emissions during coke pushing</p> <p>Finished coke is pushed from each oven into specially designed rail cars.</p> <p>A mobile guide car and fume extraction system (also known as a coke-side fume arrestment system) is used at Port Talbot to capture fugitive (dust) emissions from coke pushing.</p>	<p>Permit systems and economic instruments: IED permits</p>	<p>Start: 2015</p> <p>Expected end: 2020</p> <p>Status: Implementation</p>	<p>Source affected: Industry including heat and power production</p> <p>Spatial Scale: Local</p> <p>Cost: Not available</p> <p>Indicator: Compliance with 20 mg/m³ BAT-AEL. Reduced numbers of black pushes</p> <p>Target emissions: Not available</p>	<p>Control of fugitive emissions from coke ovens will result in lower B[a]P emissions.</p> <p>The BAT-AEL for coke pushing (dust) emissions is 10mg/m³ for bag filters and 20mg/m³ in all other cases, measured using discontinuous monitoring (spot sampling)</p> <p>A venturi scrubber system is used at Port Talbot; therefore, the applicable emission limit is 20mg/m³. This has been reflected in TATA's permit since 2015 (no change). There have been no verified breaches of the BAT-AEL since it came into force.</p> <p>Oven heating issues can result in poorly carbonised batches of coke. When pushed, visible emissions increase ('black pushes') and can overwhelm the fume extraction system.</p> <p>Availability of the guide car and fume extraction system can also influence fugitive emission levels. MCO's original system dated from the 1980s and has suffered</p>	<p>Discontinuous sampling has been retained for monitored emissions from coke pushing.</p> <p>TATA has progressed its repair programme for coke oven flues and regenerators. This work involves targeting ovens with damaged/degraded flues and regenerators, but also developing a better understanding of how this influences black push emissions. Some oven walls (with embedded flues) are also being repaired. TATA's capital expenditure (coke ovens life extension project) is allowing delivery of this work.</p> <p>Refurbished and enhanced coke-side fume arrestment system is now fully commissioned and online as of July 2021. Project delivery has been impacted by factors such as delayed crane lifts (bad weather) and Covid-19 business disruption.</p> <p>Black push numbers are being monitored by NRW to assess if TATA's interventions are having a positive influence on environmental performance.</p> <p>More generally, TATA should outline its future strategy for MCO</p>
---------------------	---	---	--	---	--	---

					<p>reliability issues. The system has since been refurbished and now comprises a replacement hood, extraction system, guide car and ducting. The new system has enhanced fume capture capability.</p> <p>Water sprays have been used during the period of unavailability to 'knock down' fugitive emissions from coke pushing.</p> <p>There is a rolling programme of repair & refurbishment for the oven gas (heating) flues. Coke oven temperature profiles and coke yields are positively affected by keeping as many gas flues as possible in working order. The difficulty associated with this work increases as the batteries age.</p> <p>NRW has introduced a reporting metric for the number of black pushes at the coke ovens. This data is now reported quarterly and is harmonised with other similar reporting requirements.</p>	<p>and clarify its preferred method of iron & steelmaking going forwards, within a wider context of developing low-carbon steelmaking technology.</p>
--	--	--	--	--	---	---

					<p>Target achieved (20mg/m³ for particulates) but ongoing maintenance is necessary to sustain compliance.</p> <p>Black pushes are scrutinised using new performance metric (see above)</p> <p>Coke Ovens performance is discussed at least every quarter with Tata Steel. Sustained compliance may become more challenging as the batteries approach the end of their campaign life.</p>	
--	--	--	--	--	--	--

Sinter Plant	<p>Improvements to Lignite Injection</p> <p>Lignite is used in combination with lime to trap and neutralise certain pollutants present in hot flue gases. These additives are injected directly into the hot flue gases. The integrity of the flues and the emissions abatement systems must be sound for lignite-lime injection to be used safely.</p>	<p>Permit systems and economic instruments: IED permits</p>	<p>Start: 2015</p> <p>Expected end: estimated 2025</p> <p>Status: Implementation</p>	<p>Source affected: Industry including heat and power production</p>	<p>Lignite-lime injection forms part of several projects to ensure that the sinter plant complies with tighter EU (IED) standards.</p> <p>There are no specific BATc or BAT-AELs designed to reduce B[a]P from sinter plant emissions. However, reducing overall emissions will result in lower B[a]P emissions.</p> <p>Associated work and regulatory interventions by NRW to address persistent particulate emission limit (BAT-AEL) breaches from the sinter plant main stack should indirectly reduce B[a]P emissions from this source.</p> <p>Main stack particulate emissions: TATA responded to an EPR Regulation 61 Information Notice in August 2018. The company's response included an action plan with timescales outlining a pathway towards compliance.</p> <p>The lignite-lime injection system at Port Talbot has not yet been commissioned. To allow use of this technology at the sinter plant,</p>	<p>A range of factors have delayed the implementation of the lignite-lime injection scheme. This includes (but is not limited to) Covid-19 disruption and EU Exit impact.</p> <p>The interior of each ESP and the (waste gas) wind main system are subject to high temperatures and continual physical abrasion by entrained dust, which progressively wears away exposed surfaces and parts. Keeping pace with this degradation and maintaining an 'air-tight' system is critical to the safe commissioning of lignite-lime injection.</p> <p>Tata Steel has adjusted its maintenance strategy to allow shorter stops to be taken more frequently within a quarterly maintenance framework, enabling worn parts to be replaced before they degrade completely.</p> <p>The engineering challenges and associated unavailability of lignite-lime injection may increase as the sinter plant ages.</p> <p>Use of customised lime products as waste gas reagents is Tata's contingency plan should the air</p>
--------------	---	---	--	--	---	---

					<p>some important preparatory steps must be completed first:</p> <ul style="list-style-type: none"> • Air ingress issues within the main stack waste gas system must be resolved. A key performance indicator is 17% oxygen within the waste gas stream - sensors are now in place to monitor this. • Upgraded valves at the base of each ESP (dust) collection hopper are subject to a rolling maintenance programme. Previously the valve seals were degrading too quickly and allowing air into the system. • Sinter process instability has contributed to elevated stack emissions and degraded ESP performance. TATA has several ongoing projects to address process instability. <p>TATA continues to pursue these steps at the time of writing.</p> <p>Bringing lignite-lime online prematurely can result in fires starting within the main stack Electrostatic Precipitators (ESPs) as a result of lignite (fuel) + heat + oxygen.</p>	<p>ingress issues prove insurmountable.</p> <p>The system is unlikely to be commissioned until the preparatory works outlined in this table have been completed and TATA's senior management authorise the scheme.</p> <p>As the Sinter Plant ages, TATA should outline its strategy for this key asset and clarify its preferred method of iron & steelmaking going forwards. Other critical assets necessary for integrated iron & steelmaking (using Blast Furnace technology) are also ageing e.g. Morfa Coke Ovens.</p> <p>TATA should present its strategy within a wider context of developing low-carbon steelmaking technology.</p> <p>A replacement sinter plant may require significant planning and capital expenditure.</p>
--	--	--	--	--	--	--

					<p>Tata has been exploring a contingency solely involving the use of lime products i.e. no lignite. There are customised lime compounds available that may deliver similar levels of waste gas reagent performance and are also capable of removing micro-pollutants. These compounds present a much lower risk of combustion compared to lignite and the impact of air (O2) ingress becomes less pronounced.</p> <p>The Sinter Plant remains an important part of NRW's compliance inspection programme for Port Talbot steelworks and we continue to apply regulatory effort to ensure the permit requirements are met. NRW is currently working with TATA to agree new timescales for the implementation of lignite injection.</p>	
--	--	--	--	--	---	--